




## ECO-3C

### COMBI CARTON CASE

ECO 3C by M.C. Automazioni is a new vertical machine, which allows placing cardboard straps rounding the flat bottom or Stabilo bags.




- Performance up to 40 bpm
- Quick format change
- Application of carton header or strap
- Application of metal rivets



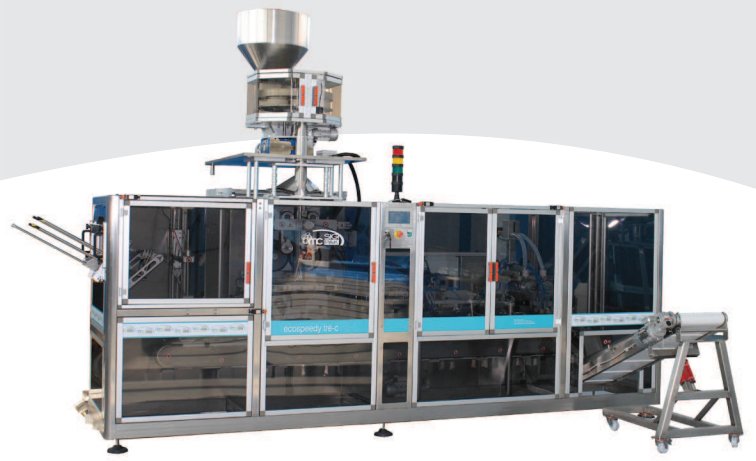

## Technical Data

Mechanical speed up to	40 bpm
Bag's min width	50 mm
Bag's max width	130 mm
Bag's min length	180 mm
Bag's max length	250 mm
Bag's min thickness	40 mm
Bag's max thickness	100 mm
Bag's shape	Flat bottom bag, Stabilo bag
Packaging material	Laminates, polypropylene
Cardboard labels min width	60 mm
Cardboard labels max width	170 mm (up to 200 mm upon request)
Controlling system	Allen Bradley or Siemens PLC
Hot-melt adhesive	Standard equipment
Recipes number	100
Cardboard labels characteristics	Non-porous material
Interface	7" color touch screen
Electrical supply	220/380/400V, 50Hz
Compressed air	6 bar
Compressed air pipe	¼ diameter 8-10 mm
Compressed air consumption	350 l/min.
Installed power (without options)	19 kWatt
Structure's material	Stainless steel AISI 304
Weight	~ 1600 kg

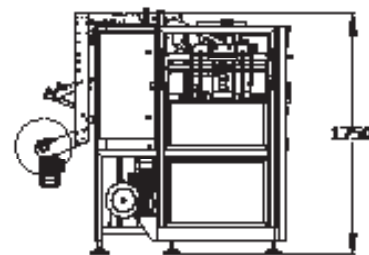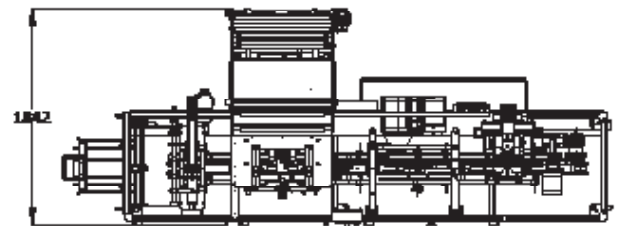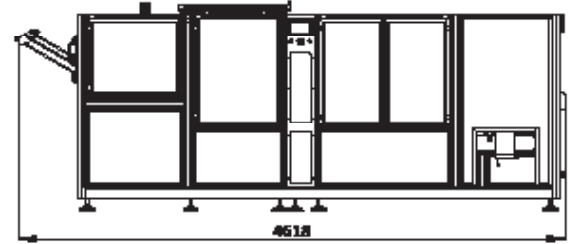

## Options

- Standard cardboard applicator
- Rivets' inserting device
- Gas injection
- Printer
- Many others upon request

Pictures of packed products are not of promotional nature, but meant to stand as examples of different packaging types. Not all represented products were packed by M.C. Automazioni s.r.l. or by Sigitaspak s.r.l.